

PRESS RELEASE

First sensor to measure heat in EV motors can reduce use of rare earths to protect magnets

Your contact:
Christopher Schrecke
+49 69 7603-61317

- **e-Motor Rotor Temperature Sensor (eRTS) technology offers more precise alternative to algorithm-based heat projection in permanent magnet synchronous EV motors**
- **Reduced tolerance from 15°C to only 3°C enables more cost-efficient use of rare earth elements and increases potential vehicle performance**
- **Bin Huo, head of the PSS segment: “This innovation shows that investing resources and focusing expertise in our E-Mobility Sensors product center were the right decision. We will continue to successively expand our EV sensor portfolio.”**

Frankfurt, Germany, June 3, 2025. AUMOVIO has developed a new sensor technology that measures the temperature inside permanently excited synchronous motors in electric vehicles (EVs) directly on the rotor for the first time. The e-Motor Rotor Temperature Sensor (eRTS) delivers significantly more precise measurement results than the current software-based temperature simulation – with a tolerance range reduced from 15°C to just 3°C. This enables vehicle manufacturers to reduce the amount of rare earth elements used to increase the magnets’ heat resistance and to improve potential motor performance, which also means greater sustainability. The eRTS is one of several sensor technologies for EVs developed by the E-Mobility Sensors (EMS) product center.

“With less resource consumption and lower costs, eRTS sensor technology is advantageous to current solutions,” says Bin Huo, head of the Passive Safety and Sensorics (PSS) segment at AUMOVIO. “This innovation shows that investing resources and focusing expertise in our product center were the right decision. We will continue to successively expand our EV sensor portfolio.”

Higher measuring accuracy helps to reduce use of rare earths

Rotors operate under extreme conditions, for example in temperatures of up to 150°C. For this reason, monitoring and controlling temperature development in EV motors is crucial. Currently, heat development is not measured directly but calculated based on the information from the stator temperature sensor, phase current measurements and environmental variables. This comes with a tolerance range of up to 15°C. To protect the magnet from demagnetization due to excessive temperature, expensive rare earth elements are used to cover the entire tolerance range and ensure the magnet is heat-resistant. With greater measuring accuracy reducing the tolerance range to 3°C, car manufacturers profit from new possibilities and freedom of choice in permanent magnet synchronous EV motor design: a significant portion of costly rare earth materials, which would normally have to exceed the higher tolerance range for safety reasons, can be saved. Another interesting variable is the possibility to improve motor performance by pushing the limits of the tolerance range.

“Our E-Mobility Sensors product center aims to increase efficiency and sustainability in electric vehicles,” says Christoph Busch, who heads the product center. “The eRTS technology is a good example of this: reducing the use of rare earths contributes to a more sustainable supply chain, especially given that the number of EVs is expected to greatly increase in the coming years and decades. In combination with other sensor technologies, such as the e-Motor Rotor Position Sensor, it can even act as a system solution to create synergies that can save car manufacturers money and effort.”

PRESS RELEASE

Ultrasound technology for energy supply and communication

eRTS contains two separate components, the mote element and the transducer element. The mote temperature sensor unit measures the temperature directly at the target area, as close as possible to the magnet. The wireless mote draws its energy only from the wired transducer that is connected to the ECU, providing the transducer with its measuring data. The transducer is located outside the EV motor on the chassis. It is connected to the inverter control, transmitting temperature information through a communication interface. Mote and transducer communicate via Piezo ultrasound, which also provides for the energy supply.

Your contact:
Christopher Schrecke
+49 69 7603-61317

Expansion of the sensor portfolio for EVs

The Passive Safety and Sensorics (PSS) segment at AUMOVIO has a long tradition of sensor technologies. It offers an extensive portfolio of around 50 different sensors for a multitude of purposes such as tire pressure monitoring, chassis position determination, wheel speed sensing and even crash sensing, providing key information on a whole range of vehicle conditions. More than two years ago, a product center for E-Mobility Sensors was dedicated specifically to this area, resulting in a fast-growing [portfolio of sensors specifically for EVs](#).


AUMOVIO continues the business of the former Continental group sector Automotive as an independent company with its spin-off in September 2025. The technology and electronics company offers a wide-ranging portfolio that makes mobility safe, exciting, connected, and autonomous. This includes sensor solutions, displays, braking and comfort systems as well as comprehensive expertise in software, architecture platforms, and assistance systems for software-defined vehicles. In the fiscal year 2024 the business areas, which now belong to AUMOVIO, generated sales of 19.6 billion Euro. The company is headquartered in Frankfurt, Germany and has about 87.000 employees in more than 100 locations worldwide.

Press contact
Christopher Schrecke
Media Spokesperson
Safety and Motion
AUMOVIO
Phone: +49 69 7603-61317
Email: christopher.schrecke@aumovio.com

Press portal: www.aumovio.com/press
Media center: www.linkedin.com/company/aumovio

PRESS RELEASE

pictures/captions

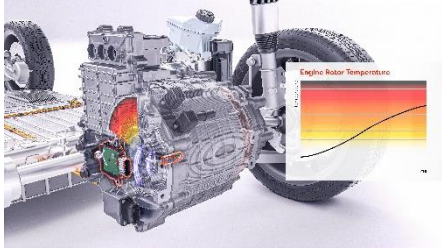

AUMOVIO_PP_eRTS_rotor_EN

The eRTS sensor technology offers a much more precise alternative to algorithm-based temperature projection in permanent magnet synchronous EV motors.



AUMOVIO_PP_eRTS_product-shot

eRTS contains two separate components: the wireless mote temperature sensor unit located close to the magnet in the EV motor and the wired transducer element located outside the EV motor. It is connected to the inverter control.

Your contact:
Christopher Schrecke
+49 69 7603-61317